

DECRA® Shake XD®



Metal Roofing Isn't What It Used To Be®

Shake XD® Features:


- Unique Hidden Fastener System
- “Cut & Tuck™” Technology
No Special Tools Required
- Direct to Deck Application
- Transferable 50 -Year Limited Warranty
(including 120 mph winds and hail penetration)
- Class 4 Impact Resistance to UL 2218
by Underwriters Laboratories (Highest Rating)
- Lightweight – Only 150 lbs. per sq. installed
(sq. = 100 sq. ft.)
- Non-Combustible Class A Rated Material
- Won't Crack, Break, Burn, Curl, Split or Rot
- Walkable, Low Maintenance, Long Life
- Non-Porous, Freeze / Thaw Resistant
- Interlocking Panels Provide Protection
Against the Elements



Classic Beauty of Handsplit Wood Shake



Shake XD® Installation Components:

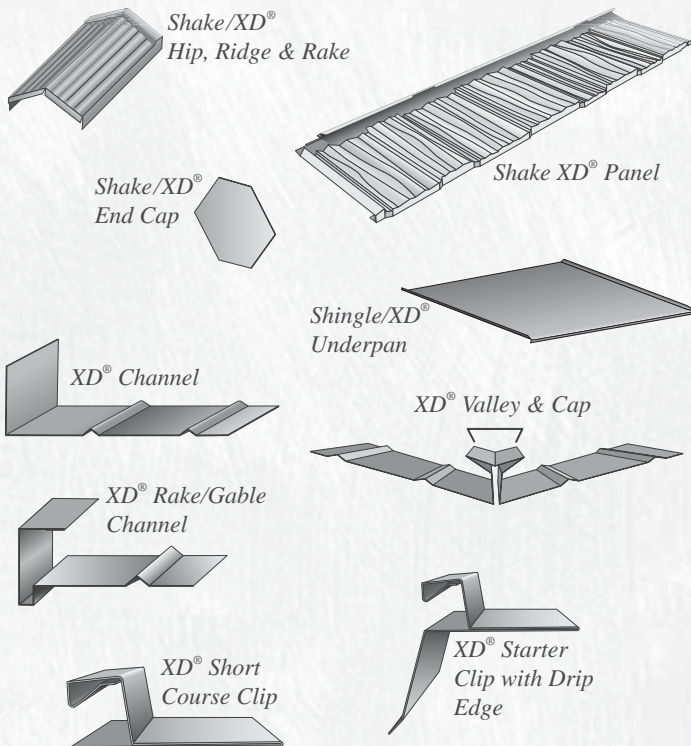

Shake XD® Specifications:

Panel Size ▶	14-1/8" x 52-1/8"
Installed Exposure ▶	12-3/8" x 49-7/8"
Panels per Square ▶	23.4
Installed Weight ▶	150 lbs./sq.

Shake XD® Color Blends



Antique Chestnut



Pinnacle Grey

50 - Year Limited Warranty; 120 mph Wind Warranty; Highest Impact Resistance to Hail; Freeze/Thaw Resistant; Fire Safe; UL File #R14710; Florida Building Code, Miami-Dade County NOA, CCMC and ICC-ES reports available at www.decra.com.



Look for our complete line of venting and debris guard accessories, designed exclusively for use with DECRA Roofing Systems.

DECRA®

Stone Coated Steel Roofing Systems

877.GO.DECRA [463.3272] | www.decra.com

