

# DECRA® Shingle XD®



## Metal Roofing Isn't What It Used To Be®

### Shingle XD® Features:


- Lifetime Limited Warranty\*  
*(including 120 mph winds and hail penetration)*
- Class 4 Impact Resistance to UL 2218  
*by Underwriters Laboratories (Highest Rating)*
- Lightweight – Only 150 lbs. / 100 sq. ft. Installed
- Non-Combustible Class A Rated Material
- Won't Crack, Break, Burn, Curl, Split or Rot
- Walkable, Low Maintenance, Long Life
- Non-Porous, Freeze / Thaw Resistant
- Interlocking Panels Provide Protection  
Against the Elements
- Tear-Off May Not Be Required *(See local code)*
- Reduces Energy Consumption & Landfill Impact
- Direct to Deck Application
- Unique Hidden Fastener System
- “Cut & Tuck”™ Technology  
*(No Special Tools Required)*



# Architectural Shingle at a Fraction of the Weight



## Shingle XD® Installation Components:

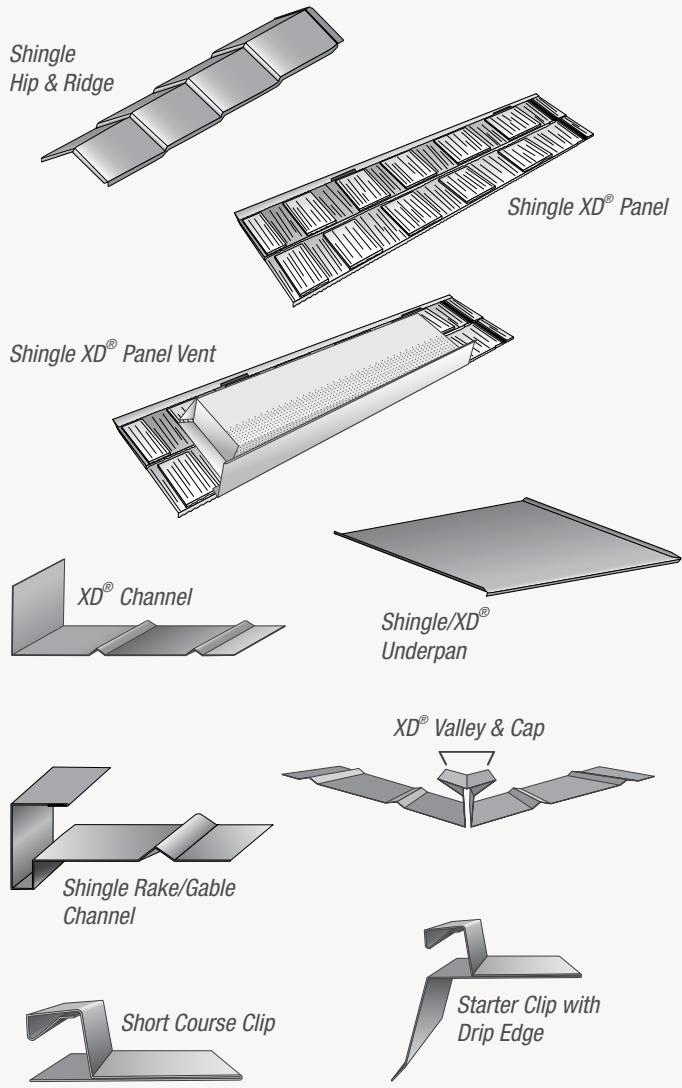

Look for our complete line of venting and debris guard accessories, designed exclusively for use with DECRA Roofing Systems.

## Shingle XD® Specifications:

Minimum Pitch ▶	4:12
Panel Size ▶	14-1/8" x 52-3/8"
Installed Exposure ▶	12-1/4" x 49-1/2"
Panels per Square ▶	23.8
Installed Weight ▶	150 lbs./sq.

## Shingle XD® Color Blends



*Classic Cobblestone*



*Midnight Eclipse*



*Natural Slate*



*Old Hickory*

Due to the printing process, colors may vary from actual product. Please refer to an actual full panel product sample before ordering.

Lifetime Limited Warranty; 120 mph Wind Warranty; Highest Impact Resistance to Hail; Freeze/Thaw Resistant; Fire Safe; UL File #R14710; Florida Building Code, Miami-Dade County NOA, CCMC and ICC-ES reports available at [www.decra.com](http://www.decra.com).



# DECRA®

Stone Coated Steel Roofing Systems

877.GO.DECRA [463.3272] | [www.decra.com](http://www.decra.com)